






M035-14 Series 0.014 [0.35] Centers

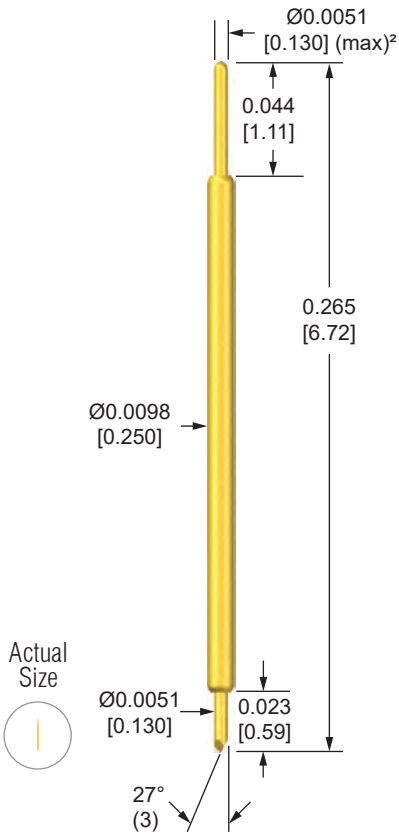

TIP STYLES FOR DUT SIDE ONLY

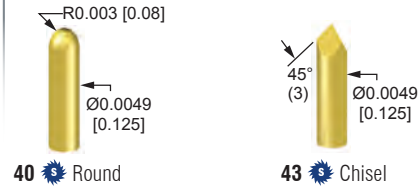

EXAMPLE OF MOUNTING CONFIGURATION

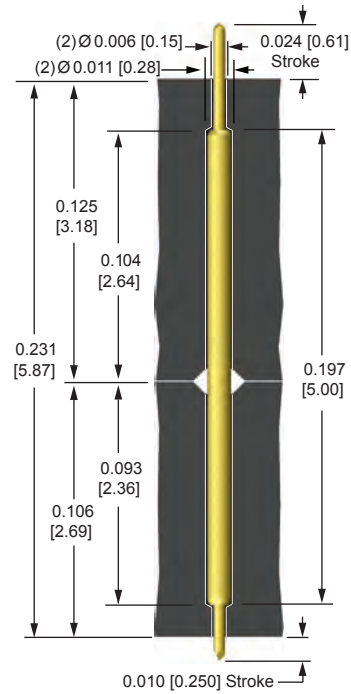

Actual stroke and plate thicknesses may vary based on application.

PROBE P/N M035PRH14 S-S example: M035PRH1443S-S

Tube	Letter	Material/Finish	Average Resistance	Current Rating AMPS ¹ 120°C (204°C) ³		
H		Phosphor Bronze/precious metal ID/OD	< 200 mOhms	1.6 (2.2) ³		
Tip Style	Digits	Material/Finish				
See Tips		Heat treated steel/gold plated over nickel				
Spring	Letter	Spring Force	Preload	@ 0.86mm Stroke	Material	Cycle Life @ 0.86mm Stroke
S	Standard	0.28 [7.8g/0.08N]	0.88 [25.0g/0.25N]	MW	100,000	
Option	Letter	Description				
S		Heat treated steel/plated gold over nickel (see tip style for availability)				

¹ Current rating is affected by spring material and lubrication choice. Please refer to Current Carrying Capacity and Testing in Extreme Working Temperature applications notes for more details.
² Maximum plunger OD should be used to calculate minimum guide plate clearance holes.
³ Working Temperature Range: up to 120°C with lubrication. SS springs can be used up to 204°C without lubrication.

